





# FRIEHT ELEVATOR

## Hoist way vertical section

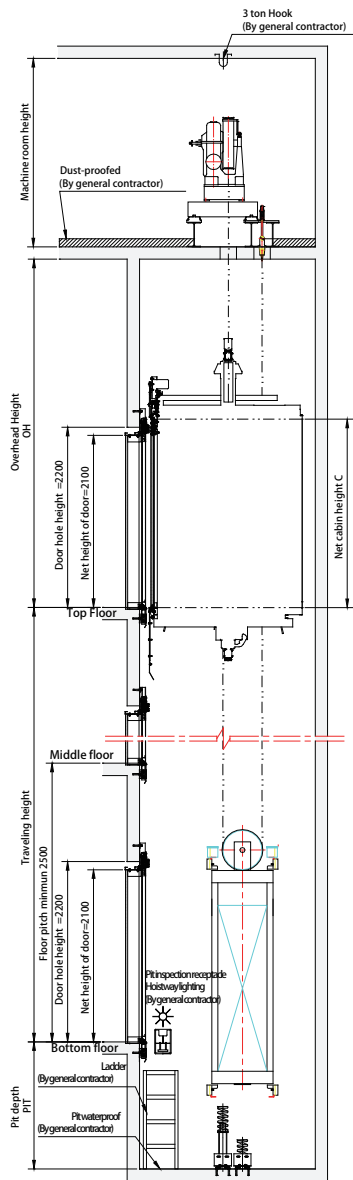

## Hoist way plan layout

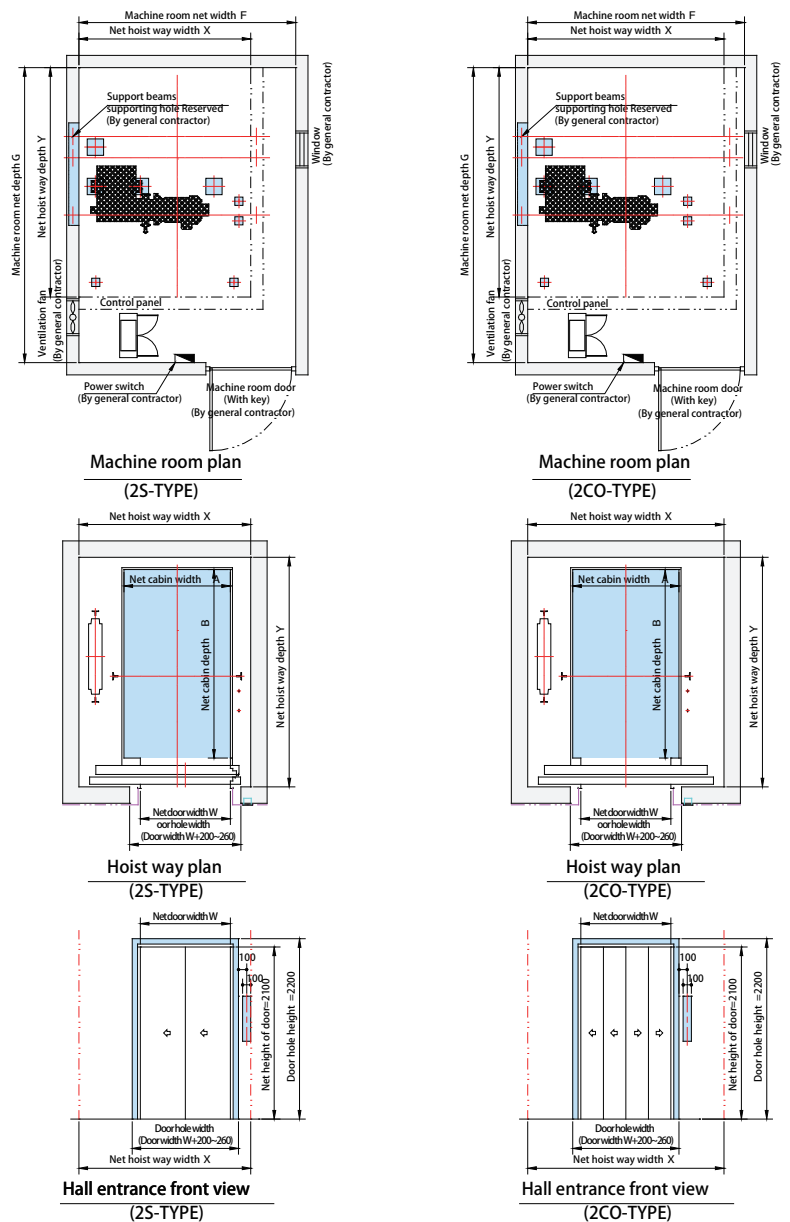

## FREIGHT ELEVATOR SPECIFICATION TABLE

TYPE	Capacity	Door Opening Type	Cabin Internal		Hall Door	Hoistway		Machine Room	
			A	B	W	X	Y	F	G
F-750	750 kg	2S	1300	2300	1100	2200	2900	2600	3950
F-1000	1000 kg	2S	1700	2300	1400	2600	2900	3150	3950
F-1500	1500 kg	2S	2200	2400	1700	3150	3000	3600	4050
F-2000	2000 kg	2S	2200	2800	1700	3150	3400	3600	4250
F-2500	2500 kg	2CO	2500	3000	2300	4050	3600	4050	4400
F-3000	3000 kg	2CO	2500	3400	2300	4100	4000	4100	4800

### Remark

- The height of car size is 2300mm The height of entrance is 2100mm.
- Was built above the tenth floor, the hoist way under this table should increase the size of 50 mm or more.
- Pit beneath the space when in use, should increase the size of the hoist way, please ask our sales staff
- Net size after the completion of the renovation dimensions are shown in this table
- If not listed in this table of type, please ask our sales staff

### Rated speed with PIT, OH, & machine room high relational table

Item	Speed	
	45 m/min	60 m/min
PIT	1550 mm	1550 mm
OH	4250 mm	4550 mm
MR	2000 mm	2000 mm