





HOME ELEVATORS


TYPE:CH-1

TYPE:NCOP-H1



TYPE:CH-2

TYPE:CH-3

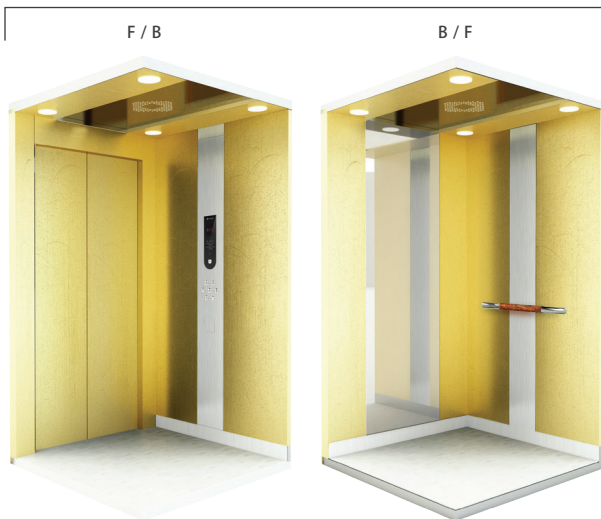

LOBBY

TYPE:HIND-H1

SPECS



FRONT

PANEL



- Cabin ceiling : Steel paint or pvc film laminated metal, acrylic modeling patio additional energy-efficient LED lighting.
- Cabin wal : pvc film laminated metal
- Cabin door : pvc film laminated metal
- Cabin door jamb : pvc film laminated metal
- Kick plate : Hairline stainless steel
- Sill : Hardened Aluminum
- Cabin floor : PVC floor tiles




HOME ELEVATORS

TYPE:CH-5



TYPE:NCOP-H2

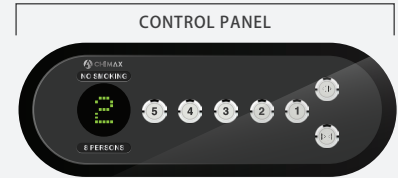

TYPE:CH-4



TYPE:CH-6



LOBBY



TYPE:HIND-H2



SPECS

- Cabin ceiling : Steel paint or pvc film laminated metal, acrylic modeling patio additional energy-efficient LED lighting.
- Cabin wal : pvc film laminated metal
- Cabin door : pvc film laminated metal
- Cabin door jamb : pvc film laminated metal
- Kick plate : Hairline stainless steel
- Sill : Hardened Aluminum
- Cabin floor : PVC floor tiles




HOME ELEVATORS


TYPE:CH-9



TYPE:NCOP-H2

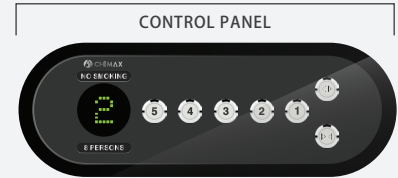

TYPE:CH-8

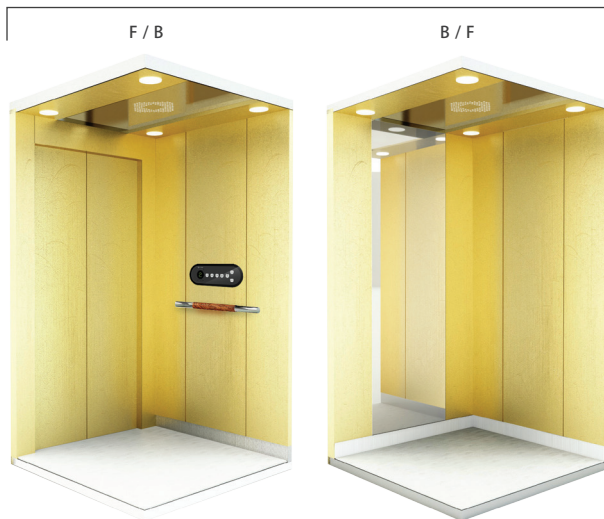

TYPE:CH-7



LOBBY



TYPE:HIND-H2




SPECS


- Cabin ceiling : Steel paint or pvc film laminated metal, acrylic modeling patio additional energy-efficient LED lighting.
- Cabin wal : pvc film laminated metal
- Cabin door : pvc film laminated metal
- Cabin door jamb : pvc film laminated metal
- Kick plate : Hairline stainless steel
- Sill : Hardened Aluminum
- Cabin floor : PVC floor tiles



Hoist way vertical section

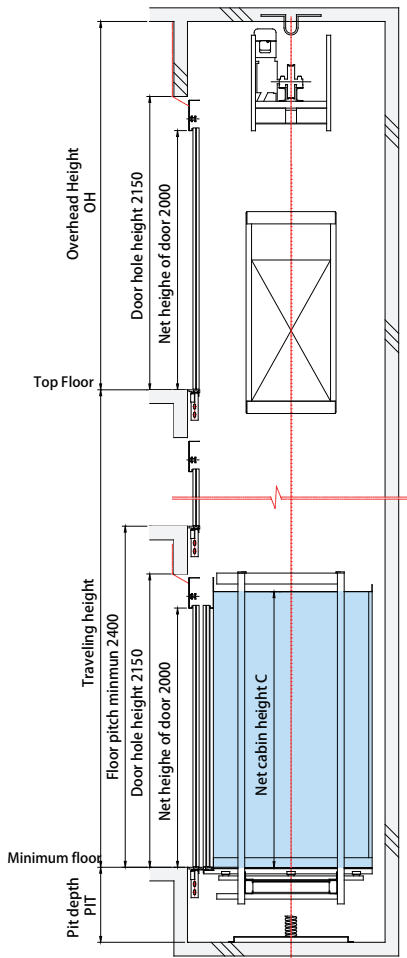

Hoist way plan layout

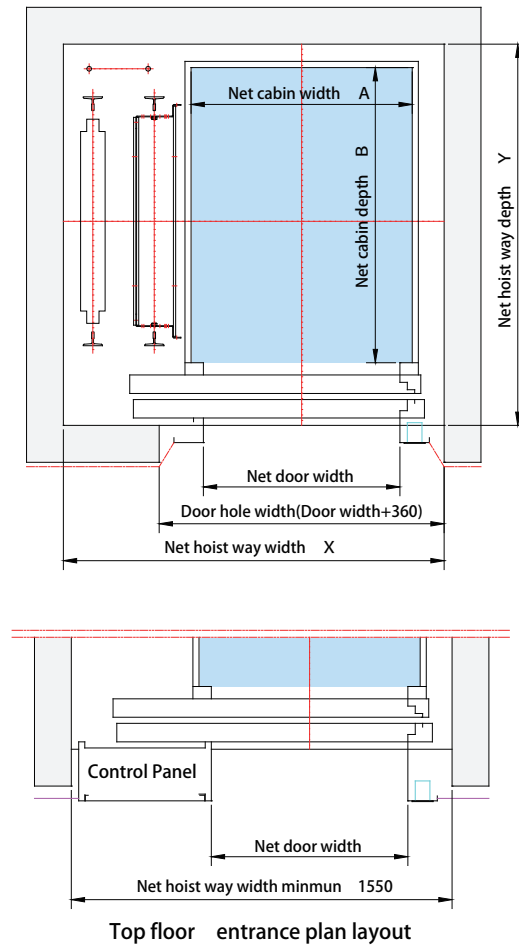

HOME ELEVATOR SPECIFICATION TABLE

Applicable	Single house	Duplex house	
Drive mode	Wire rope type		
Capacity	3 Persons(200kg)	6 Persons(450kg)	
Power Supply	Traction Motor	Single phase 220V , 3 phase 220V or 3 phase 380V , 50Hz or 60Hz	
	Lighting	Single phase 110V or 220V , 50Hz or 60Hz	
Motor capacity	1.5Kw	3.7Kw	
Limit the number of floors	5 Floors	6 Floors	
Travelling Height	15m	18m	
speed	20 m/ minute	30 or 45 m/minute	
Door Opening type	2 doors opening from one side (Electric)		
Hoistway Dim. (mm)X×Y	1550(W)×1550(D)	1650(W)×1650(D)	1750(W)×1550(D)
Cabin Internal Dim. (mm)A×B×C	900(W)×1200(D)×2100(H)	900(W)×1300(D)×2100(H)	1000(W)×1200(D)×2100(H)
Hall Door Dim.(mm)	800(W)×2000(H)		900(W)×2000(H)
OH	3000mm	4200mm	
Pit	700mm	1250mm	
Remark	N/A	can use self-propelled wheelchair	

NOTE: When the elevator hoistway as steel structure, elevator shaft size Please ask our sales staff.

PERFECTION IS OUR GOAL

SAFETY EFFICIENCY COMFORT ENVIRONMENT SPACE



OPERATION OFFICES

TAIPEI HEAD OFFICE

Tel:02-2537-1355
Fax:02-2567-5205

Address: 2F., No.129, Sec. 2,
Minsheng E. Rd., Zhongshan Dist.,
Taipei City 104, Taiwan (R.O.C.)

TAOYUAN FACTORY

TEL: (03) 361-0491
FAX: (03) 362-7316

Address: No.253, Yongfeng Rd.,
Bade Dist., Taoyuan City 334,
Taiwan (R.O.C.)

TAICHUNG OFFICE

TEL: 04-2321-2301
FAX: 04-2325-6774

Address: 4F.-7, No.55, Guanqian
Rd., West Dist., Taichung City
403, Taiwan (R.O.C.)

KAOSIUNG OFFICE

TEL: (07) 261-1321
FAX: (07) 215-0326

Address: 7F.-9, No.103, Zhongzheng
4th Rd., Xinxing Dist., Kaohsiung City
800, Taiwan (R.O.C.)

OVERSEAS AGENT

THAILAND

THAI INTERNATIONAL MACHINERY &
ELECTRIC CO.,LTD

TEL: (662) 246-1962~3
FAX: (662) 246-1964

Address: 61/279 Rama 9 Road, Huay
Kwang, Huay Kwang, Bangkok 10310

VIET NAM

MECHANICAL AND ELECTRICAL
CO.,LTD(MECO.,LTD.)

TEL: (84) 4-3628-0410
FAX: (84) 4-3628-0431

Address: 256/9/3 Pho Vong Str.,Hai Ba
Trung-Hanoi Viet nam

CHINA SHANGHAI

YUANCHENG MACHINERY&ELECTRICAL
TECHNETRONIC(SHANGHAI)CO.,LTD

TEL: (86) 021-69590760
FAX: (86) 021-69590755

Address: NO.585 Chun Gui Road.Huangdu
Town.Jiading District,Shanghai City
China.201804

