





Hoist way vertical section

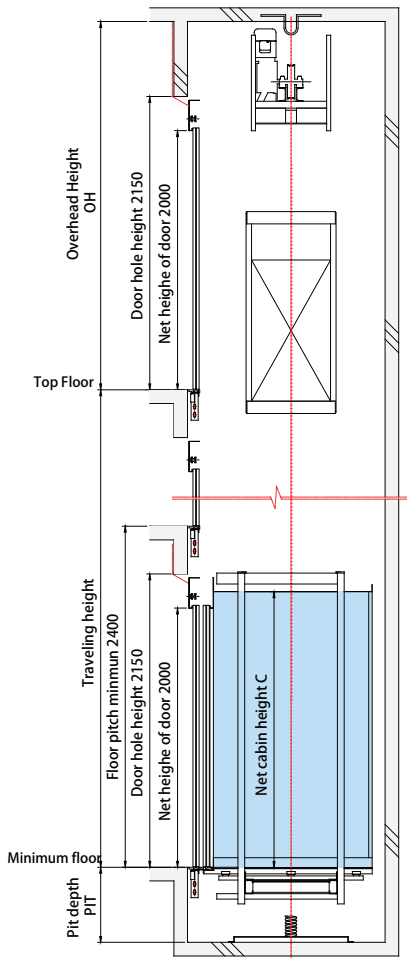

Hoist way plan layout

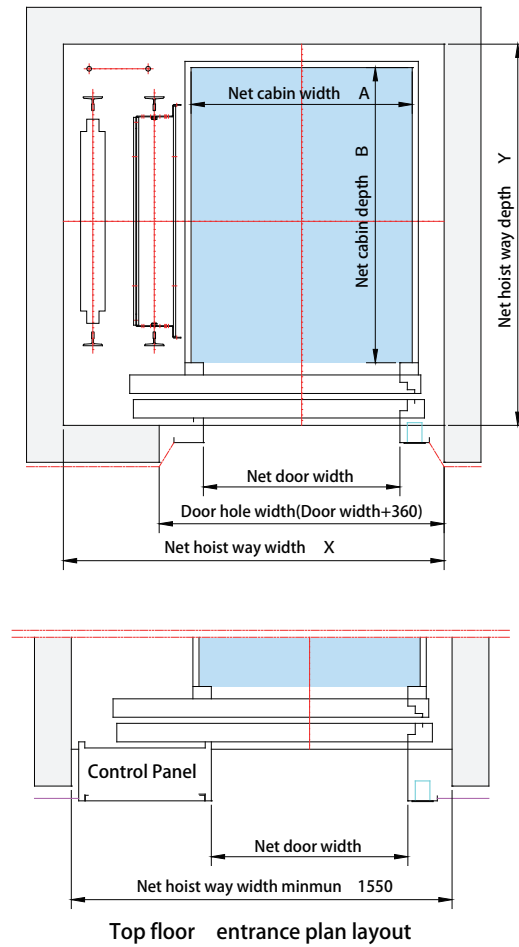

HOME ELEVATOR SPECIFICATION TABLE

Applicable	Single house	Duplex house	
Drive mode	Wire rope type		
Capacity	3 Persons(200kg)	6 Persons(450kg)	
Power Supply	Traction Motor	Single phase 220V , 3 phase 220V or 3 phase 380V , 50Hz or 60Hz	
	Lighting	Single phase 110V or 220V , 50Hz or 60Hz	
Motor capacity	1.5Kw	3.7Kw	
Limit the number of floors	5 Floors	6 Floors	
Travelling Height	15m	18m	
speed	20 m/ minute	30 or 45 m/minute	
Door Opening type	2 doors opening from one side (Electric)		
Hoistway Dim. (mm)X×Y	1550(W)×1550(D)	1650(W)×1650(D)	1750(W)×1550(D)
Cabin Internal Dim. (mm)A×B×C	900(W)×1200(D)×2100(H)	900(W)×1300(D)×2100(H)	1000(W)×1200(D)×2100(H)
Hall Door Dim.(mm)	800(W)×2000(H)		900(W)×2000(H)
OH	3000mm	4200mm	
Pit	700mm	1250mm	
Remark	N/A	can use self-propelled wheelchair	

NOTE: When the elevator hoistway as steel structure, elevator shaft size Please ask our sales staff.